


毡密封圈及槽的型式及尺寸（JB/ZQ4606-1997）

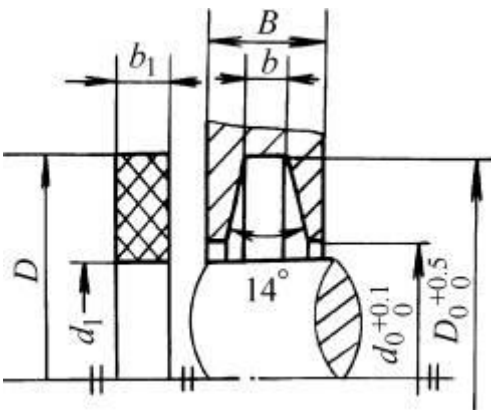

标记示例
 轴径 d=40mm 的毡圈记为：
 毡圈 40 JB/ZQ 4606—1997

轴径 d	毡 封 圈			槽					轴径 d	毡 封 圈			槽				
	D	d1	b1	D0	d0	b	Bmin			D	d1	b1	D0	d0	b	Bmin	
							钢	铸铁								钢	铸铁
16	29	14	6	28	16	5	10	12	120	142	118	10	140	122	8	15	18
20	33	19		32	21				125	147	123		145	127			
25	39	24	7	38	26	6	12	15	130	152	128	12	150	132	10	18	20
30	45	29		44	31				135	157	133		155	137			
35	49	34		48	36				140	162	138		160	143			
40	53	39		52	41				145	167	143		165	148			
45	61	44	8	60	46	7			150	172	148		170	153			
50	69	49		68	51				155	177	153		175	158			
55	74	53		72	56				160	182	158		180	163			
60	80	58		78	61				165	187	163		185	168			
65	84	63		85	66				170	192	168		190	173			
70	90	68		88	71				175	197	173		195	178			
75	94	73	9	92	77	8			180	202	178		200	183			
80	102	78		100	82				185	207	183		205	188			
85	107	83		105	87				190	212	188		210	193			
90	112	88		110	92				195	217	193	14	215	198	12	20	22
95	117	93	10	115	97	200	222	198	220	203							
100	122	98		120	102	210	232	208	230	213							
105	127	103		125	107	220	242	213	240	223							
110	132	108		130	112	230	252	223	250	233							
115	137	113		135	117	240	262	238	260	243							

注：毡圈材料有半粗羊毛毡和细羊毛毡，粗毛毡适用于速度 $v \leq 3\text{m/s}$ ，优质细毛毡适用于 $v \leq 10\text{m/s}$ 。